

Vibro-Profi

ANTIVIBRATION RUBBER MAT

PRODUCT CHARACTERISTICS

Composition: Recycled polyurethane-bounded rubber granulate
 Surface: Granular texture with dimple profile on one side
 Color: Black
 Dimensions: 150 x 10 cm in rolls. Precut in 10 x 12.5 cm
 Thickness: Max 17 mm, min 8 mm.
 Load range: 0-0.05 N/mm²
Max Load: 500 kg/Lm
Max Load: 60 kg/piece (10 x 12,5 cm)
 Natural Frequency $f_0 = 19$ Hz at maximum load






Vibro-Profi
strip

Vibro-Profi is supplied in pre-cut strip that has incisures every 12.5 cm for easy cut to individual pads.

TECHNICAL INFORMATION

Compression Set:	approx 4.10%	DIN 53572, (Measured 30' after decompression with 50% deformation/23°C after 72 hrs.)
Tensile Strength:	minimum 0.30 N/mm ²	ISO 1798
Elongation at break:	minimum 60 %	ISO 1798
Tear Resistance:	minimum 3.0 N/mm	DIN 53515
Static Modulus of Elasticity:	0.10-0.44 N/mm ²	Similar to EN 826

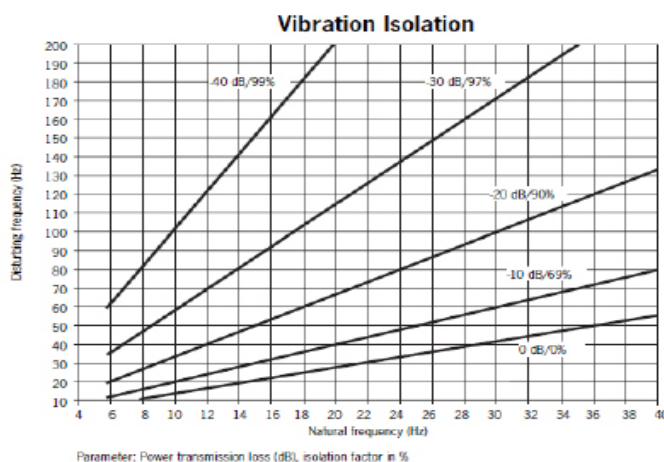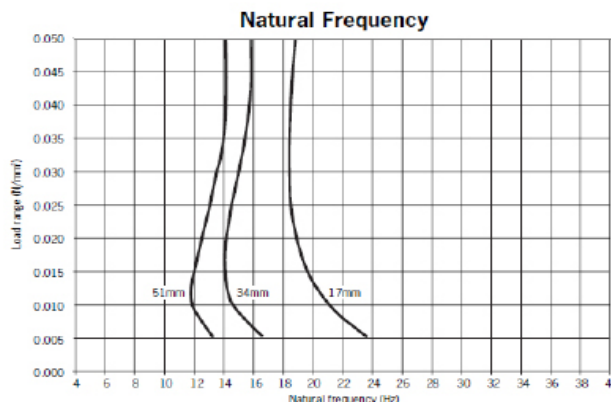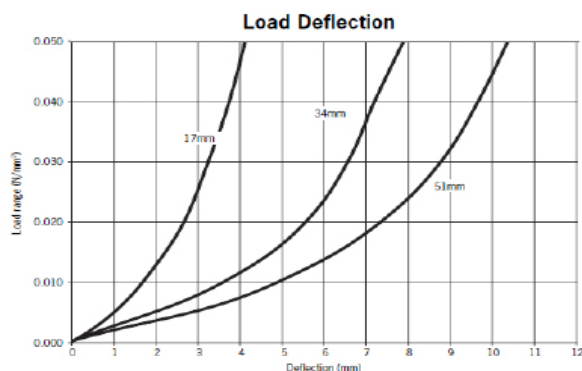

Eco-friendly

The information on this data sheet is based on the current state of our knowledge and experience and is subject to change without notice.

ALPHA ACOUSTIKI S.A.

EUID: ELGEMI.004207401000

T.: +30 210 6779875

www.vibro.gr - info@vibro.gr

ALPHA
ACOUSTIKI