


MONOSETO WALL

Single-layer windproof membrane with high vapor permeability. Intended for use in construction for insulation against wind, rain and humidity.

PRO SYSTEM

Product is available in special assembly system called PRO. PRO SYSTEM is based on two integrated self-adhesive tapes. This solution guarantees

- proper sealing of overlaps in all weather conditions
- effective roof insulation with energy savings

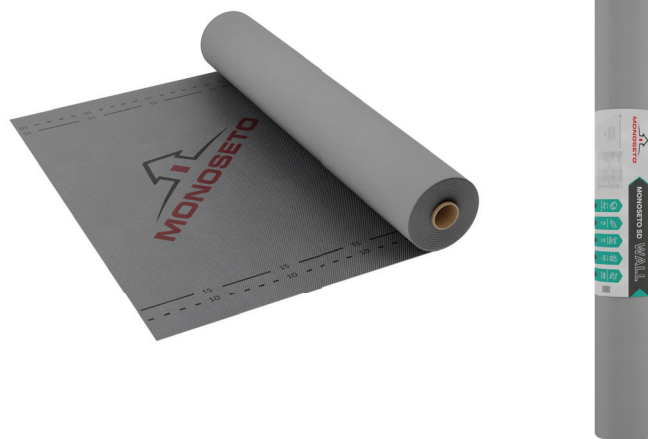

Characteristic	Values
Mass	ok. 90 g/m ² (±10%)
Vapor permeability	3000 g/m ² /24h
Roll size	1,5 m x 50 mb = 75 m ²
Reaction to fire	F
Resistance to water penetration	W3
UV resistance	3 months*
Tensile strength MD	≥240 N/50 mm (+/- 90 N/50 mm)
Tensile strength CD	≥160 N/50 mm (+/- 90 N/50 mm)
Elongation MD	≤80%
Elongation CD	≤80%
Tearing Resistance MD	≥100 N (+/-90 N)
Tearing Resistance CD	≥100 N(+/-90 N)
Flexibility at low temperatures	at -30 °C Conforming
Artificial ageing by long term exposure to the combination of UV radiation and elevated temperature and heat	
Tensile strength MD change	<30%
Tensile strength CD change	<30%
Elongation MD change	≤80%
Elongation CD change	≤80%
Water vapour transmission properties	Sd = 0,02 m
Hazardous substances	Does not contain

*UV stabilization even up to 3 months according to artificial ageing performed in the laboratory related to the conditions of average sun exposure for the climate in Central Europe.

Przywory, 04.2024 r.